



PLACE ADDITIONAL REINFORCEMENT ON THE NEXT COURSE OF SEGMENTAL UNITS IMMEDIATELY ABOVE THE SPECIFIED PLACEMENT ELEVATION IN A MANNER THAT ELIMINATES GAPS LEFT BY THE PREVIOUS LAYER OF GEOSYNTHETIC AT THE SPECIFIED REINFORCEMENT ELEVATION.

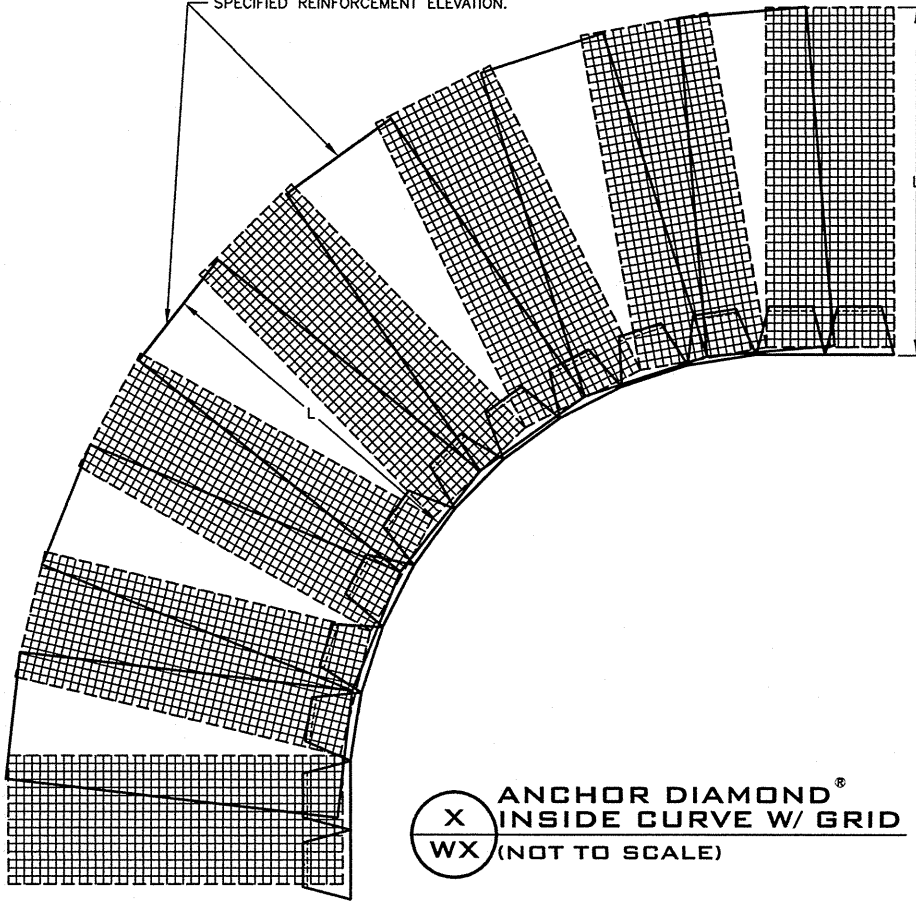


ANCHOR DIAMOND[®]
X INSIDE CURVE W/ GRID
WX (NOT TO SCALE)

← PRINCIPLE REINFORCEMENT DIRECTION

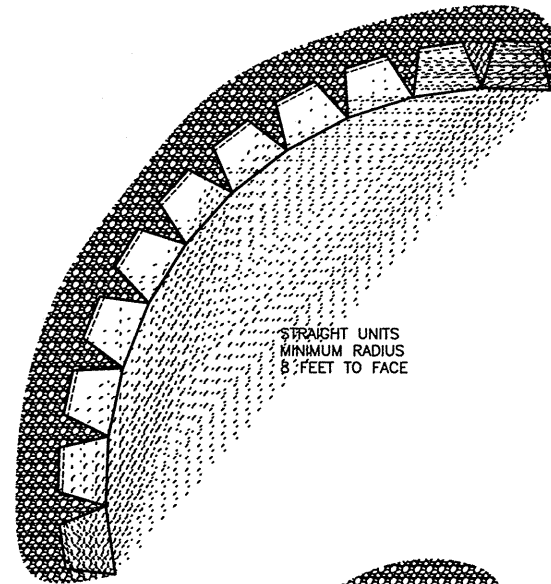

STRAIGHT UNITS
 MINIMUM RADIUS
 8 FEET TO FACE



BEVELED UNITS
 MINIMUM RADIUS
 4 FEET TO FACE

ANCHOR DIAMOND[®]
X INSIDE CURVE
WX (SCALE: 3/8" = 1'-0")



These graphical representations are intended for preliminary design purposes only, and are not to be used for construction without the signature of a registered professional engineer.

All information herein © 2005 Anchor Wall Systems

Drawn By:

AWS

Date:

4/26/2005

Scale:

AS SHOWN

Drawing Title:

**ANCHOR DIAMOND
 INSIDE CURVE DETAILS**

Project Information:

ANCHOR RETAINING WALL SYSTEMS
 TYPICAL WALL DETAILS